

Indoor Micro Tube Cable





Features

- Max. core: 288
- Small volume, light weight, high fiber density
- Thin sheath of module unit, minimum oil filling, easy install
- Tool-free stripping, suitable for terminal connection and mid-span branching
- Flexible, easy coiled in the floor distribution box
- Flame retardant, low smoke, non-toxic
- Suitable for high temperature environment



Applications

- Indoor installation
- Data center

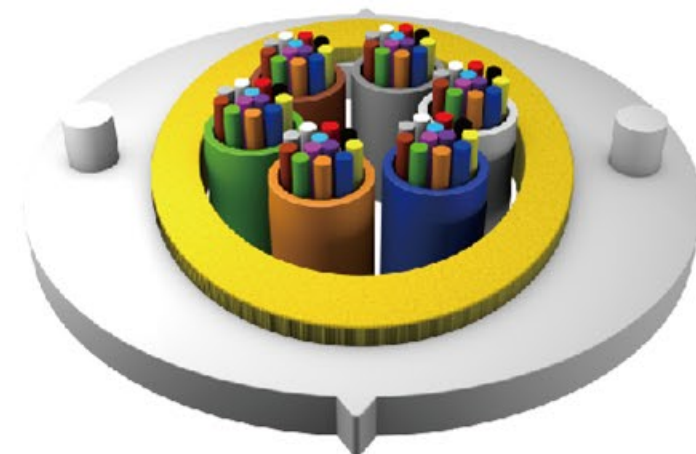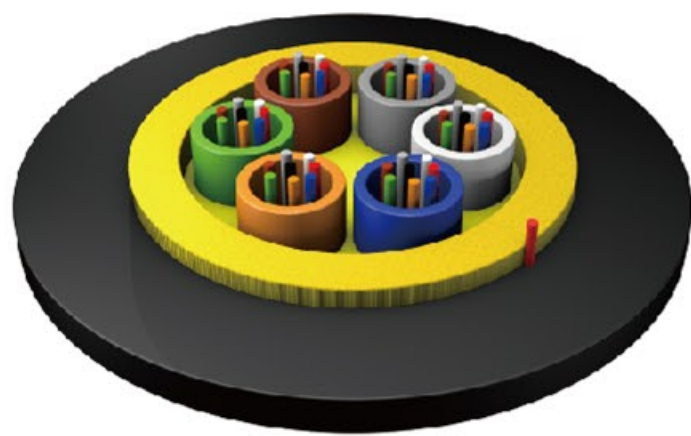

Installation performance

- Min. bend radius: installation 20D, operation 10D
- Temperature range: storage -20~+60°C, installation -5~+40°C, operation -10°C~+60°C



Flexible



Easy Strip



Eco-friendly



Flame Retardant



Water Blocking



Anti-lightning Strike



Indoor

• Products can be customized, included but not limited to the above