

3.2 | EASYCONNNS DP
461C/461D series

High strength material
Anti UV performance
with good weather adaptability

Outdoor application
Wall or pole or
wire messenger mounting

Neat fiber management
1:8 or 1:4 splitter (900µm pigtail type)
could be configured inside
and good protection

Compact model
Easy to install
convenient for large-scale construction


Compact model Big capacity

EASYCONNNS DP provides a protected access point between the distribution cable and the drop cable. Supporting two kinds of cable routing, FiberHome DP provides an ideal connection point to simplify the network installation and maintenance. In addition, 900µm pigtail type splitter could be equipped. With the protection grade of IP68. EASYCONNNS DP is adaptable to any harsh environments, even with limited space.




Structure


FitDP-461C



FitDP-461D

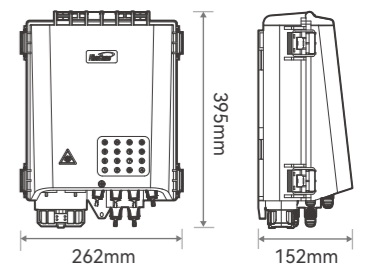

FitDP-461CA



Performance

Item	461C	461D
Size (H × W × D)	332mm × 260mm × 110mm	395mm × 262mm × 152mm
Color	Black	Black
Cable capacity	2 (mid-span) + 1(branch cable)	2 (mid-span) + 2(branch cable)
Splitter	1:4 or 1:8 micro-type splitter	1:4 or 1:8 or 1:16 micro-type splitter
Splice capacity	Max.48 pcs	Max.96 pcs
Adapter capacity	Max.8 pcs (EASYCONNS ADAPTER)	Max.16 pcs (EASYCONNS ADAPTER)
Cable diameter	Ø 10-18mm (mid-span) / Ø 10-14mm (branch cable)	Ø 10-18mm (mid-span) / Ø 10-14mm (branch cable)
Ingress protection grade	IP68	IP68

Item	461CA
Size (H × W × D)	269mm × 208mm × 102mm
Color	Black
Cable capacity	2 (mid-span) + 1(branch cable)
Splitter	1:4 or 1:8 micro-type splitter
Splice capacity	Max.48 pcs
Adapter capacity	Max.8 pcs (EASYCONNS ADAPTER)
Cable diameter	Ø 10-18mm (mid-span) / Ø 10-14mm (branch cable)
Ingress protection grade	IP55

THANKS FOR READING

Maximize the potential of digital connections and benefit the society