


12


Cable pole line hardware are mainly used for fiber aerial installation. Those components can meet cable installation requirement of different solutions. Below photos show the common application of those components.

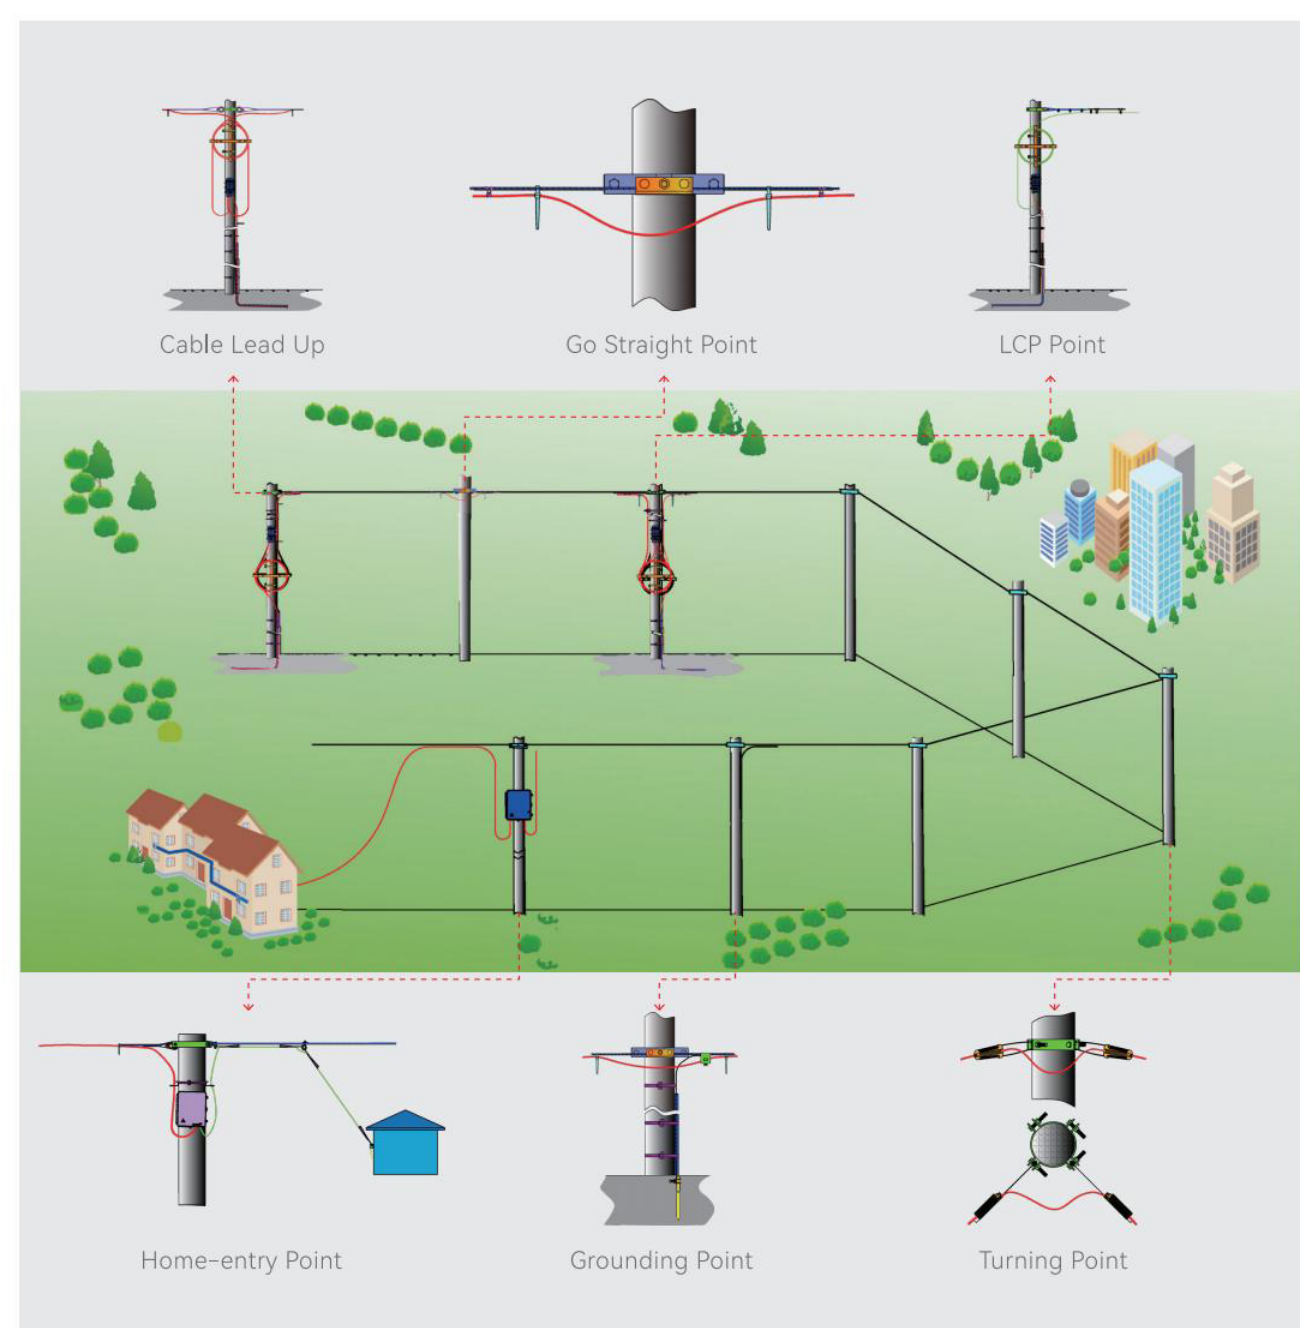

CA Pole Clamp

Type	Pole diameter (mm)	Type	Pole diameter (mm)
CA-140-160	140-160	CA-240-260	240-260
CA-160-180	160-180	CA-260-280	260-280
CA-180-200	180-200	CA-280-300	280-300
CA-200-220	200-220	CA-300-325	300-325
CA-220-240	220-240	CA-325-350	325-350

- Hot dip galvanized steel or customization
- Used for pole clamp requiring straight lines

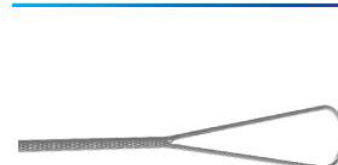

Guy Grip

Type	Span length (L, m)	Messenger diameter (Φ, mm)	Type	Span length (L, m)	Messenger diameter (Φ, mm)
ANY 0900 100	L≤100;	Φ:8.0~9.0	ANY 1600 100	L≤100;	Φ:15.1~16.0
ANY 1000 100	L≤100;	Φ:9.1~10.0	ANY 1700 100	L≤100;	Φ:16.1~17.0
ANY 1100 100	L≤100;	Φ:10.1~11.0	ANY 1300 200	L≤200;	Φ:12.1~13.0
ANY 1200 100	L≤100;	Φ:11.1~12.0	ANY 1400 200	L≤200;	Φ:13.1~14.0
ANY 1300 100	L≤100;	Φ:12.1~13.0	ANY 1500 200	L≤200;	Φ:14.1~15.0
ANY 1400 100	L≤100;	Φ:13.1~14.0	ANY 1600 200	L≤200;	Φ:15.1~16.0
ANY 1500 100	L≤100;	Φ:14.1~15.0	ANY 1700 200	L≤200;	Φ:16.1~17.0

- Made of galvanized steel or customization, guarantee long duration and life service
- Reliable mechanical ultimate strength characteristics
- Suitable for different diameters of cable messengers



Thimble

Type	Suitable for messenger wire
Thimble-3	7/2.2
Thimble-5	7/2.6
Thimble-7	7/3.0

- Used on pole band to work as an interface fitting to connect the guy grip or guy wire



3-bolt Suspension Clamp Straight

Type	Suitable for messenger wire
JB3Y1CD-Φ7	7/2.2 7/2.4 7/2.6
JB3Y1CD-Φ9	7/2.8 7/3.0 7/3.5

- Hot dip galvanized steel or customization
- Used in securing and supporting a messenger strand or suspension wires attached to poles



Anchor Clamp

Type	Key parameter
AC-06	Suitable diameter of cable messenger wire: 3~6mm

- Made of a fiber glass body ,a pair of wedges and a flexible ball
- Designed for anchoring optical cable
- Easy installation, direct dead-ending of aerial figure 8 cable with steel messenger without additional tools



Steel Strap

Type	Key parameter
STRAP-W18	Width x Thickness: 18mm x 0.75mm

- Made of stainless steel
- Meet the needs of securing heavy loads
- Used with buckle



Steel Strap Buckle

Type	Key parameter
BUCKLE-W18	Width x Thickness: 20mm x 0.75mm

- Made of stainless steel
- Used with stainless strap , to attach pole hardware
- Good mechanical strength because of special shape of buckle



Fasten Hook

Type	Key parameter
CB-01	Max width of the steel strap: 28mm

- Used for anchoring drop cable clamp
- Attached on concrete poles by stainless strap
- Galvanized process to guarantee long-term usage



S Type Fixing Clip

Type	Key parameter
DCCS-01	Cable size: 2x5.2mm

- Used on dead-end fiber networks
- Have a principle of a round route for fixing the messenger tightly
- Installed on buildings, poles, strand with hooks, pole brackets, and other wire fittings and hardware



P Type Fixing Clip

Type	Key parameter
DCCP-01	Cable size: 2x5.2mm

- Made of stainless steel (clamp body and wire) and rubber (plastic shim)
- Used on dead-end fiber networks
- Installed on buildings, poles, strand with hooks, pole brackets, and other wire fittings and hardware



Cable Clamp

Type	Key parameter
CC-01	Drop cable size: 2x5.2mm

- Made of plastic
- Designed for suspending drop cable
- Secure cable to surface
- Suitable for self-supporting drop cable

THANKS FOR READING