



Fiber Distribution Hub

03

FitDH series fiber distribution hub provides a passive connection between fiber optic cable and optical splitter outdoors. In an outdoor environment.

It has the advantages of large capacity, low insertion loss and long life cycle, and is suitable for FTTH network applications.


Features

- Flexible configuration
- Cabling consolidation



FitDH230 Direct Splicing Fiber Distribution Hubs

Type	Size (H×W×D,mm)	Capacity (F)	Capacity of splitter	Installation type
FitDH-230-S2-288-A	1035×560×310	288	16	Pedestal
FitDH-230-S3-576-A	1460×760×540	576	16	Pedestal

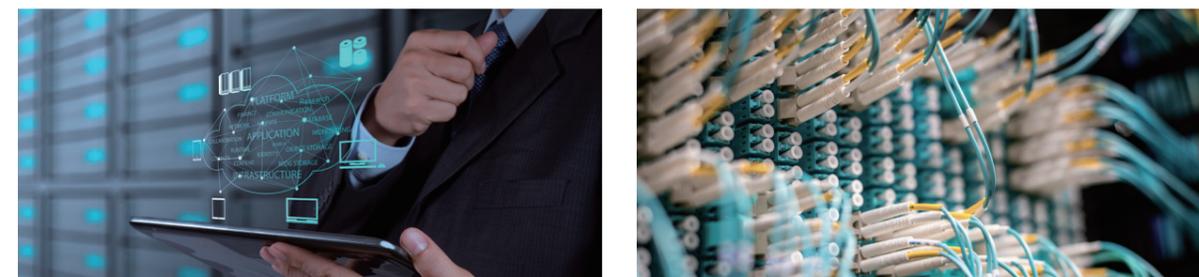

FitDH240 Connectorized Fiber Distribution Hubs

Type	Size (H×W×D,mm)	Capacity (F)	Capacity of splitter	Installation type
FitDH-240-S2-144-A	1035×560×310	144F	11	Pedestal
FitDH-240-S12W-144-A1	800×560×310	144F	11	Wall-mounted
FitDH-240-S12P-144-A1	800×560×310	144F	11	Pole-mounted
FitDH-240-S3-288-A1	1460×760×320	288F	36	Pedestal
FitDH-240-S7-576-A1	1460×760×540	576F	64	Pedestal