


# Flat Unitube



## Features

- Max. core: 24
- Small volume, light weight
- Water blocking, all dielectric, anti-lightning strike, and anti- electromagnetic interference
- Easy strip, convenient construction and maintenance, various installation methods
- Superior mechanical and environmental performance

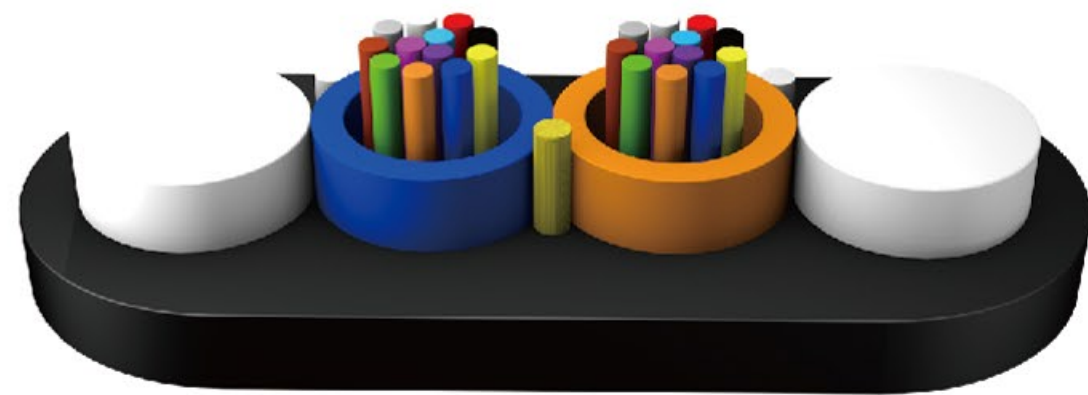

## Applications

- Aerial installation
- Duct installation
- Indoor access



## Installation performance

- Min. bend radius: installation 50H, operation 25H
- Temperature range: storage -40~+70°C, installation -20~+60°C, operation -40°C~+70°C



Easy Strip



Hi-crush



Water Blocking



Anti-lightning Strike



Aerial



Duct



Last-mile Connection

• Products can be customized, included but not limited to the above