

AN4121-AM

Ceiling-mounted Optical AP



Flexible Access ●

Wired and wireless access

Smart Wi-Fi ●

Dual-band Wi-Fi 7

Flexible Deployment ●

Ceiling-mountable

About the Device

The AN4121-AM developed by FiberHome is a ceiling-mounted Wi-Fi ONU (also known as optical AP) supporting Wi-Fi 7. It provides a symmetric 2.5G GPON upstream port on the network side, and one 2.5GE port and dual-band Wi-Fi 7 interface on the user side.

Featuring flexible deployment, the AN4121-AM supports three power supply modes (PoF, PoE, and power adapter) as well as ceiling mounting to meet installation requirements in various scenarios.

Highlights

Diverse Service Interfaces

- Supports symmetric 2.5G GPON access.
- Provides both wired and wireless interfaces.

Gigabit Wireless Coverage

- Provides dual-band Wi-Fi 7 interface.
- Delivers a gigabit wireless network experience.


Flexible Deployment

- Supports ceiling mounting.
- Supports three power supply modes: PoF, PoE and power adapter.

Application

The AN4121-AM ceiling-mounted Wi-Fi ONU can serve as an all-optical sub-gateway for government and enterprise networks. When paired with a primary gateway for government and enterprise use, it delivers wired and wireless network coverage for small and medium-sized enterprises (SMEs). This setup facilitates a comprehensive all-optical networking solution, providing corporate users with services such as wired / wireless Internet access, high-definition video streaming, and voice telephony.

- Networking scenario: The AN4121-AM ceiling-mounted optical AP typically connects to a primary gateway, forming an all-optical solution tailored for small and medium-sized businesses alongside the primary gateway.
- Application features: The AN4121-AM provides a variety of interfaces, meeting comprehensive service needs such as wired access, Wi-Fi coverage, and voice telephony.

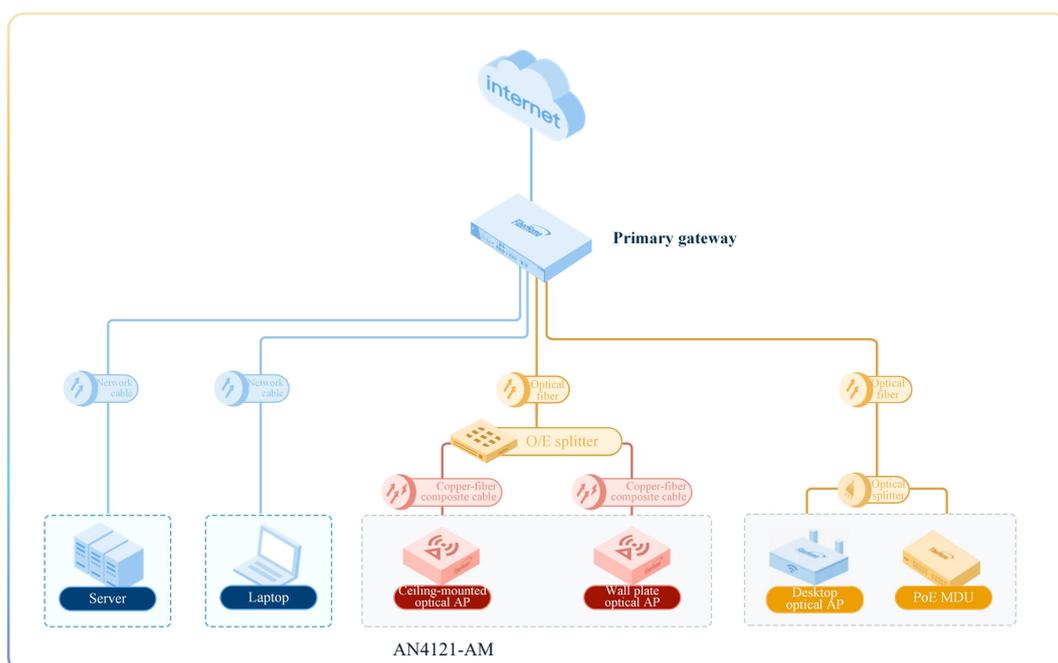

Specifications

Classification	Item	Specification
Overall specifications	Network side interface	Symmetric 2.5G GPON
	User side interface	1 × 2.5GE + 2.4 GHz & 5GHz Wi-Fi 7
	Overall power supply	<ul style="list-style-type: none"> PoF: 56 V / 0.26 A PoE: 56 V / 0.26 A Power adapter: 12 V DC / 1.0 A
	Operating temperature	-10°C to 50°C
	Operating humidity	5% to 95%RH (non-condensing)
Network side interface	Configuration	Symmetric 2.5G GPON
	Port type	SC interface
	Port rate	Downstream: 2.488 Gbit/s; upstream: 2.488 Gbit/s
	Function	Optical fiber access
LAN port	Configuration	1 × 2.5GE
	Port type	RJ-45
	Port rate	Auto-negotiated to 10 / 100 / 1000 / 2500 Mbit/s
	Standard	IEEE 802.3
	Function	<ul style="list-style-type: none"> Adding / stripping of VLAN tags based on Ethernet ports MAC address limit MAC address learning
Wi-Fi interface	Configuration	Wi-Fi 7
	Air interface rate	688 Mbit/s (2.4 GHz), 2882 Mbit/s (5 GHz)
	Standard	IEEE 802.11be (2.4G & 5G)
	Function	<ul style="list-style-type: none"> 2×2 MU-MIMO (2.4G & 5G) Channel bandwidth: 20/40/80/160 MHz Wi-Fi Multi Media (WMM) Multi-SSID
DC power interface	Function	<ul style="list-style-type: none"> PoF: 56 V / 0.26 A PoE: 56 V / 0.26 A Power adapter (non-standard): 12 V DC / 1.0 A



Features

Ethernet Service

VLAN transparent transmission	1:1 VLAN translation
Adding / stripping of VLAN tags based on Ethernet ports	Line identifiers

Security

MAC / IP address filtering	IPv6 / IPv4 firewall
Protection against various network attacks (including ARP, ICMP and DoS attacks)	

Smart O&M

Web UI management: allows login to the web management page to check device status.	Remote platform management: displays the device status information and more.
Collective management through a primary gateway	

Multicast

IGMP Snooping	IGMP V2/V3
IGMP Proxy	MLD Snooping
MLD V1/V2	



QoS and ACL

ACL: Traffic is analyzed and processed according to ACL rules.	QoS with three scheduling modes: SP, WRR and SP+WRR
Queue mapping: Packets are mapped to different queues according to their 802.1p / DSCP priority.	Traffic rate control and priority remarking based on traffic classification rules
ONU-specific bandwidth control to guarantee services with high priority	Rate control on Ethernet ports
WAN rate control	

Wi-Fi

IEEE 802.11 b/g/n/ax/be (2.4G)	IEEE 802.11 a/n/ac/ax/be (5G)
OFDMA and 4096 QAM modulation	Automatic selection of channels
Security authentication through WPA, WPA2 and WPA3	Up to 64 user connections
20/40 MHz bandwidth mode for the 2.4G frequency band	20/40/80/160 MHz bandwidth mode for the 5G frequency band

Copyright © FiberHome Telecommunication Technologies Co., Ltd. All rights reserved.

No part of this document (including the electronic version) may be reproduced or transmitted in any form or by any means without prior written permission from FiberHome.

Trademarks and Permissions

 and other FiberHome trademarks are trademarks of FiberHome Telecommunication Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

General Disclaimer

All or part of the products, services and features described in this document may not be within your purchase scope or usage scope. In case of inconsistency, the contract shall prevail. The information in this document may contain predictive statements. Actual results may differ materially from those expressed or implied in predictive statements due to numerous factors. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Information in this document is subject to change without notice due to upgrade or other needs. FiberHome Telecommunication Technologies Co., Ltd.

FiberHome Telecommunication Technologies Co., Ltd.

Address: No.6, Gaoxinsilu, High-Tech Development Zone, Wuhan, Hubei Province, P. R. China
 Postcode: 430205
 Website: <http://www.fiberhome.com>
 Tel: +86 800-8800787; +86 400-8890787

